


CONTROLLER #2: MANUAL ONLY
 #1 TREES SOUTH SIDE OF BLDG
 #2 LAWN AREA NEAR PARKING LOT AND OFFICE
 #5 SAME AREA AS #2

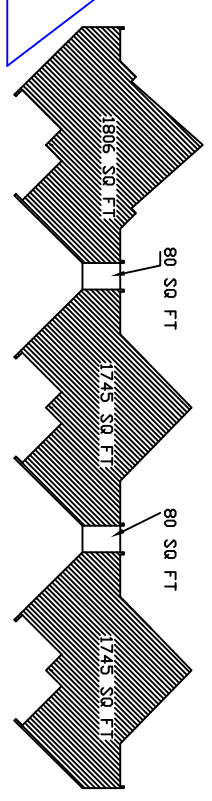

DESCRIPTION	MANUFACTURER	QTY	PRICE EA	TOTAL
VALVE 1 1/4" BRASS SHUT OFF		1	61.49	
1-1/4" X 20' SCHEDULE 40 PVC		23	6.00	
1-1/4" SPLIT END ELBOW		2	1.19	
1-1/4" SPLIT END ELBOW		2	5.27	
1-1/4" SPLIT END ELBOW		5	9.9	
1-1/4" SPLIT END ELBOW		1	227.40	
PRESSURE VACUUM BREAKER 1 1/4"	IRRI-TROL	1	118.04	
CONTROLLER 9 STATIONS RD900		10	.75	
WIRE .250" 8 CONTROL 5 1 RETURN		2507	60.00	
IN LINE Valve, 1 1/2"				
SPRINKLER, 3/4" PG ADJ	HUNTER	1	11.15	
VALVE BOX		1	30.00	
TEFLON TAPE		1	2.49	
PURPLE PRIMER, 80Z		1	1.19	
PVC CEMENT, 40Z		1	1.19	
Rental, Trencher				160.00

WATER PRESSURE 70 PSI
 23 SEC/5 GAL=1394/L/MIN




FIGURE 1 PHASE 2 IRRIGATION PLAN